

# Quectel MC60

## Ultra-small LCC Quad-band GSM/GPRS/GNSS Module



Quad-band



GPRS Multi-slot  
Class 12



Extended Temperature  
Range -40°C to +85°C



Highly Compact Size



LCC Package



Embedded Internet  
Services Protocols



Dual SIM Single  
Standby



Digital Audio



Bluetooth 3.0



Multi-GNSS System



### Key Benefits

- ☞ Ultra compact size: 18.7 × 16.0 × 2.1mm
- ☞ Multi navigation constellation: GPS/ GLONASS/ QZSS
- ☞ GNSS receiver channels: 99 acquisition/ 33 tracking channels
- ☞ Powerful AGPS functions: Autonomous AGPS EASY™/ Offline AGPS EPO™/ Online AGPS QuecFastFix
- ☞ Built-in LNA for better GNSS sensitivity (-167dBm@Tracking): able to use passive GNSS antenna without the need of any extra LNA
- ☞ Enhanced GNSS features: SDK command/ AIC/ LOCUS/ GLP
- ☞ GSM quad-band: 850/ 900/1800/1900MHz
- ☞ Multi internet protocols: TCP/ UDP/ PPP/ HTTP/ FTP/ SSL
- ☞ Support Voice, SMS, QuecFOTA™, DSSS, OpenCPU
- ☞ Support Bluetooth V3.0: SPP & HFP-AG profiles


MC60 is a quad-band full-featured GSM/GPRS module using LCC castellation package. With an extensive set of internet protocols (TCP, UDP, PPP, FTP, HTTP and SSL\*), it has integrated the GNSS technology for satellite navigation. Based on the latest 2G chipset, it has the optimal performance in SMS & data transmission as well as audio service even in harsh environments. It features Dual SIM Single Standby function.

MC60 module integrates both GPRS and GNSS engines in one compact and low profile SMT package. It supports EPO™ technology which provides predicted Extended Prediction Orbit to speed up TTFF without need of extra server. Based on EPO data, QuecFastFix Online function further reduces TTFF in cold start, making cold start TTFF comparable to that in hot start. EASY™ (Embedded Assist System) technology is also supported. It enables the GNSS engine to achieve a very fast first fix when there is no enough satellite information. MC60 additionally supports working in proven AlwaysLocate™ and GLP (GNSS Low Power) modes, which ensure great positioning accuracy while with very-low power consumption. The built-in LNA provides the module with improved RF sensitivity and exceptional acquisition/tracking performance even in weak signal areas.

The compact form factor, great positioning performance, low power consumption and dual SIM card interfaces make MC60 the best choice for a wide range of M2M applications, such as automotive, telematics, wearable device, asset tracker, pet tracker, and so on.

# Quectel MC60

## Ultra-small LCC Quad-band GSM/GPRS/GNSS Module

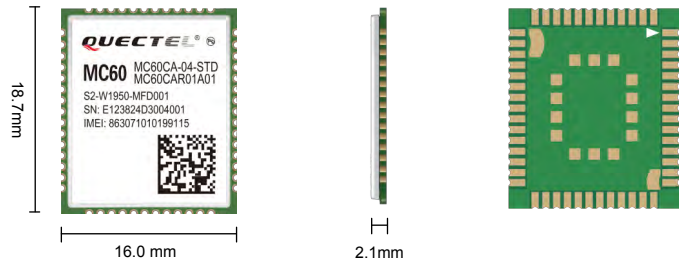

### General Features

Quad-band	850/900/1800/1900MHz
GPRS Multi-slot Class	Class 12
GPRS Mobile Station	Class B
Compliant to GSM Phase 2/2+	Class 4 (2W @850/900MHz) Class 1 (1W @1800/1900MHz)
Supply Voltage Range	3.3~4.6V, 4.0V Typ.
Low Power Consumption	1.2mA@DRX=5
Operation Temperature	-40 °C ~ +85 °C
Dimensions	18.7 × 16.0 × 2.1mm
Weight	Approx. 1.3g
Control via AT Commands	GSM 07.07, 07.05 and other enhanced AT commands

### Specifications for Data Function

GPRS Class 12	85.6kbps (Downlink) 85.6kbps (Uplink)
PBCCH	Support
Coding Schemes	CS 1, 2, 3, 4
USSD	Support
Non Transparent Mode	Support
Protocols	TCP/UDP/FTP/HTTP/PPP/SSL

### Specifications for SMS Function

Point-to-point MO and MT	
SMS Cell Broadcast	
Text and PDU Mode	

### Specifications for Voice Function

Speech Codec Modes	Half Rate (HR) Full Rate (FR) Enhanced Full Rate (EFR) Adaptive Multi-Rate (AMR)
Echo Arithmetic	Echo Cancellation Echo Suppression Noise Reduction

### Specifications for GNSS Function

GPS L1 Band Receiver (1575.42MHz)	Channel	33 (Tracking) / 99 (Acquisition) / 210 (PRN)
GLONASS L1 Band Receiver (1601.71MHz)	C/A Code	
	SBAS	WAAS, EGNOS MSAS, GAGAN
Horizontal Position Accuracy	Autonomous	<2.5 m CEP
Velocity Accuracy	Without Aid	<0.1m/s
Acceleration Accuracy	Without Aid	0.1m/s <sup>2</sup>
Advanced Technologies	EASY™/LOCUS™/AlwaysLocate™/GLP/SDK/ AIC/EPO™/QuecFastFix Online	
Reacquisition Time		<1s
TTFF@-130dBm with QuecFastFix Online	Cold Start	<4.5s
TTFF@-130dBm with EASY™	Cold Start	<15s
	Warm Start	<5s
	Hot Start	<1s
TTFF@-130dBm without EASY™	Cold Start	<35s
	Warm Start	<30s
	Hot Start	<1s
Sensitivity	Acquisition	-149dBm
	Tracking	-167dBm
	Reacquisition	-161dBm
Dynamic Performance	Maximum Altitude	Max.18000m
	Maximum Velocity	Max.515m/s
	Maximum Acceleration	4G

### Interfaces

SIM/USIM	×2, 3V/1.8V
SD*	×1
UART	×3 (×1 UART port, ×1 Debug port, ×1 GNSS UART port)
Analog Audio Channel	2 output channels and 1 input channel
Bluetooth	BT 3.0 Profile: SPP/HFP-AG
ADC	×1
GPIO	×1
PCM*	×1 (LGA pad)
RTC	×1
Antenna PAD	×3 (×1 GSM antenna pad, ×1 GNSS antenna pad, ×1 Bluetooth antenna pad)

\* Under development

HQ address: Office 501, Building 13, No.99,  
Tianzhou Road, Shanghai, China 200233  
Tel: +86 21 51086236  
Fax: +86 21 54453668